


Supply busbars, entry terminals

"standard" distribution

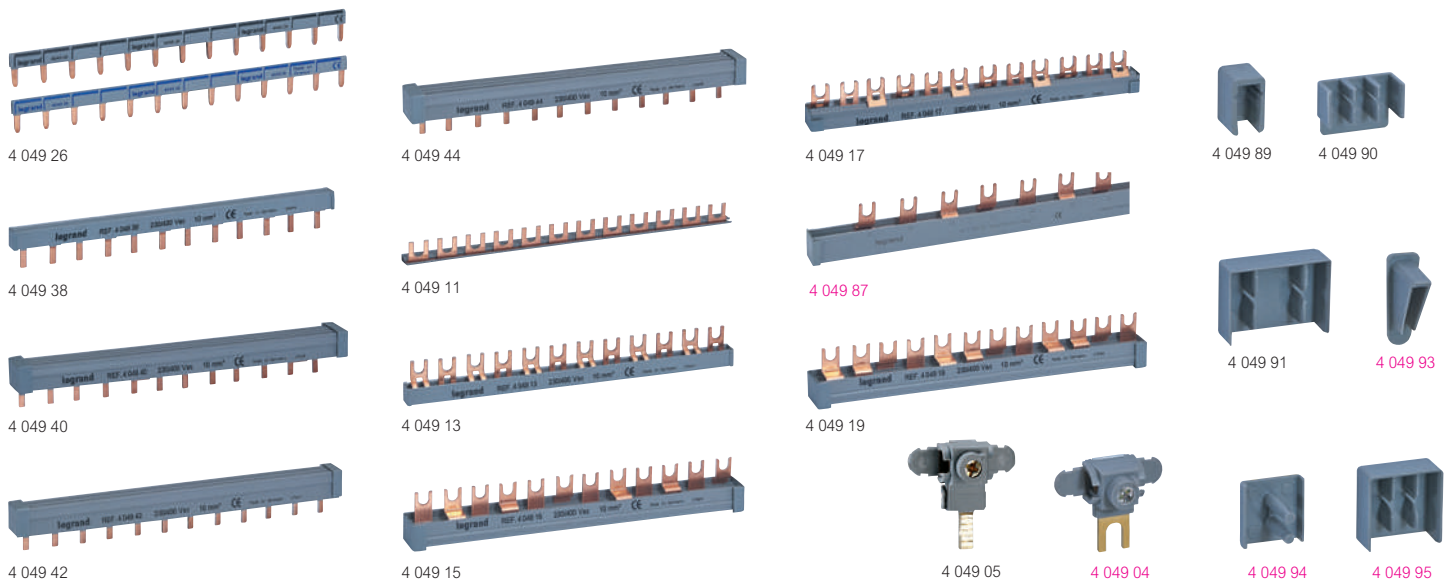

Technical characteristics [see e-catalogue](#)
Selection of protections for supply busbars (p. 200)

Pack	Cat.Nos	Prong-type supply busbars		
		Universal single pole + neutral		
		Reversible: blue for neutral, black for live		
		Length	Max. number of devices connected	
20	4 049 26 ¹	1 row	13	
20	4 049 28 ¹	1 row	18	
10	4 049 37	Meter	57	
10	4 049 33	Single pole for auxiliary		
		Meter	37	
10	4 049 38 ¹	Double pole		
10	4 049 39	1 row	6	
		Meter	28	
10	4 049 40 ¹	Double pole balanced on 3 phases		
		1 row	6	
10	4 049 66 ¹	Three pole		
10	4 049 41	1 row	9	
		Meter	28	
10	4 049 42 ¹	Three pole for auxiliary		
10	4 049 43	1 row	4	
		Meter	19	
10	4 049 34	Three pole for auxiliary		
		Meter	16	
10	4 049 44 ¹	Four pole		
10	4 049 45	1 row	3	
		Meter	14	

Pack	Cat.Nos	Fork-type supply busbars		
		Single pole		
		Length	Max. number of devices connected	
10	4 049 11 ¹	1 row	12	
10	4 049 12	Meter	57	
10	4 049 09	Single pole for auxiliary		
		Meter	37	
10	4 049 13 ¹	Double pole		
10	4 049 14	1 row	6	
		Meter	28	
10	4 049 15 ¹	Double pole balanced on 3 phases		
		1 row	6	
10	4 049 67 ¹	Three pole		
10	4 049 16	1 row	9	
		Meter	28	

Pack	Cat.Nos	Fork-type supply busbars (continued)		
		Three pole		
10	4 049 17 ¹	1 row	4	
10	4 049 18	Meter	19	
10	4 049 87 ¹	Three pole for 1.5 module/pole MCBs		
		1 row	12	
10	4 049 10	Three pole for auxiliary		
		Meter	16	
10	4 049 19 ¹	Four pole		
10	4 049 20	1 row	3	
		Meter	14	

Pack	Cat.Nos	Protection		
		Protection of prongs		
20	4 049 88	12 modules Can be cut to length		
		Protection of prong-type and fork-type supply busbar ends		
40	4 049 89	For single pole/single pole + neutral supply busbars Cat.Nos 4 049 26/28/33/37		
20	4 049 90	For three pole supply busbars Cat.Nos 4 049 10/34/42/43		
20	4 049 91	For four-pole supply busbars Cat.Nos 4 049 15/16/19/20/40/41/44/45/66/67		
20	4 049 93	For single pole supply busbars Cat.Nos 4 049 09/11/12		
20	4 049 94	For double pole supply busbars Cat.Nos 4 049 13/14/38/39		
20	4 049 95	For three-pole supply busbars Cat.Nos 4 049 17/18/87		

Pack	Cat.Nos	Entry terminals		
20	4 049 05	For universal single pole + neutral or single pole supply busbars		
10	4 049 04	Cross section: 4 to 25 mm ² - IP 2X		
10	4 049 04	For fork-type supply busbars		
20	4 049 06	Cross section: 4 to 25 mm ² - IP 2X		
20	4 049 06	For all supply busbars		
		Cross section: 6 to 35 mm ²		

1: Filled with end protection