

Patch panel, Category 3, 50xRJ45/u

P/N: 509020

Cat.3

16
MHz




features

- LSA termination blocks
- fast and easy installation using Krone® insertion tool
- connects voice services from backbone networks into the structured cabling
- enables transmission of all analog and digital voice protocols excluding IP telephony
- guarantees a bandwidth of 16 MHz
- designed for 19" cabinets
- integrated cable management

application

- primary (Campus), secondary (Riser)
- ISDN

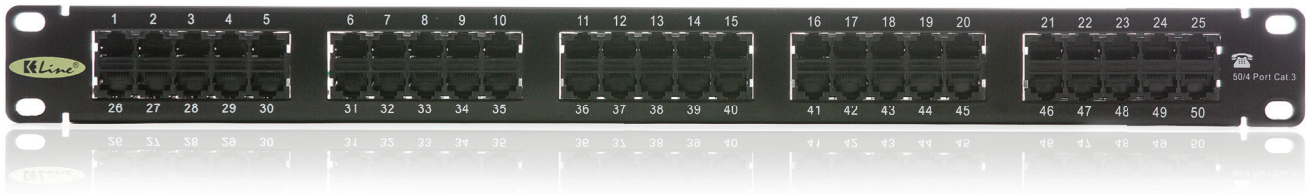

construction

Height	1U (44,5 mm)
Width	19" (482,6 mm)
Depth (including cable management)	125 mm
Material	steel
Color	black RAL9005
Surface	structured, matt

mechanical properties

Suitable for cables with solid wires	from 0,41 to 0,64 mm (AWG 26 - AWG 22)
IDC contact material	nickel plated phosphor-bronze alloy
Contact pin material	plated phosphor/bronze alloy
IDC retermination	min. 20
Insertion / extraction cycles RJ45	min. 750

electrical properties

Current rating	1,5A max
Insulation resistance	500 MΩ min
Dielectric strenght	750V AC, 60Hz 1min
Contact resistance	100 mΩ max

related products

P/N: [SYKFY50](#)

Multipair telephone cable SYKFY, 50x2x0,5

P/N: [64172055-01](#)

LSA insertion tool Krone®