


## Plexo™ boxes IP 55 - IK 07

with direct entry membrane glands - 650 °C

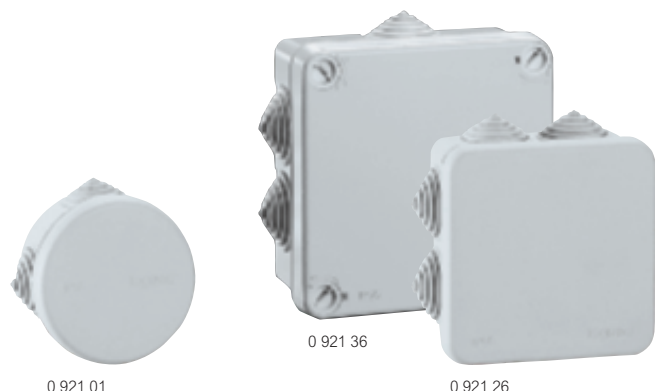

Dimensions **p. 592**  
 Technical characteristics **p. 593**

Resistance to glow wire test: 650 °C (EN 60695 2-11)  
 Operating temperature: - 25 °C to + 40 °C  
 Interchangeable membrane glands with direct entry  
 Material: polystyrene box and polypropylene cover  
 Opaque cover  
 Membrane gland or pre-cut knock-out for ISO type cable gland

Pack	Cat.Nos	Standard boxes
		Grey RAL 7035 With fixing slots for easy alignment Use 5 mm Ø screws Alternatively use wall fixing Cat.No 0 319 57 Clip-on cover
100	0 921 00	<b>Ø60 mm x 40 mm</b> 4 glands (Cat.No 0 919 10)
100	0 921 01	<b>Ø70 mm x 40 mm</b> 4 glands (Cat.No 0 919 10)
100	0 921 04	<b>65 x 65 x 40 mm</b> 7 glands (Cat.No 0 919 10)
		<b>Class II boxes</b>
		Grey RAL 7035 Mounting by: - either internal fixing points - use 5 mm Ø screws - or at three corners outside the wiring area - use 4 mm Ø screws Provision for anti-tamper seal Cover with 4 x 1/4 turn fixings, indicated I-O, can be retained open during installation
100	0 921 26	<b>80 x 80 x 45 mm</b> 7 glands (Cat.No 0 919 10)
50	0 921 27	With pre-cut knock-outs
50	0 921 36	<b>105 x 105 x 55 mm</b> 7 glands (Cat.No 0 919 11)
30	0 921 37	With pre-cut knock-outs
		<b>Accessories</b>
20	0 312 10	Strip with four 4 mm <sup>2</sup> terminal for junctions For fitting in Plexo boxes Cat.Nos 0 921 00/01, 0 921 04/26/27

## Plexo™ boxes IP 55 - IK 07

with direct entry membrane glands - 750 °C



Dimensions **p. 592**  
 Technical characteristics **p. 593**

Resistance to glow wire test: 750 °C (EN 60695 2-11)  
 Operating temperature: - 25 °C to + 40 °C  
 Interchangeable membrane glands with direct entry  
 Captive cover with clippable tie between box and cover except boxes 310 x 240 and 360 x 270  
 Cover opens/closes with a 1/4 turn of a regular screwdriver, marking 0 and 1  
 Class II is ensured by protection caps (supplied) for the attachment screws

Pack	Cat.Nos	Square boxes
		Grey RAL 7035
1	0 920 32	<b>130 x 130 x 74 mm</b> 10 glands Ø cables and tubes accepted 4 to 25 mm
		<b>Rectangular boxes</b>
		Grey RAL 7035
20	0 920 42	<b>155 x 110 x 74 mm</b> 10 glands Ø cables and tubes accepted 4 to 25 mm
10	0 920 52	<b>180 x 140 x 86 mm</b> 10 glands Ø cables and tubes accepted 4 to 32 mm
10	0 920 62	<b>220 x 170 x 86 mm</b> 14 glands Ø cables and tubes accepted 4 to 32 mm
2	0 920 82	<b>310 x 240 x 124 mm</b> 24 glands Ø cables and tubes accepted 4 to 40 mm
1	0 920 92	<b>360 x 270 x 124 mm</b> 24 glands Ø cables and tubes accepted 4 to 40 mm