

**D-SERIES**  
**FS 4CO**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com



Accessories for D-SERIES relays include:

- Relay bases
- LED / Protective modules
- Metal retaining clips

**General ordering data**

Type	FS 4CO
Order No.	<a href="#">7760056107</a>
Version	D-SERIES, Relay base, Continuous current: 10 A, Screw connection
GTIN (EAN)	4032248855575
Qty.	10 pc(s).

## Data sheet

### D-SERIES FS 4CO

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technical data

### Dimensions and weights

Width	31 mm	Height	71 mm
Depth	29.5 mm	Weight	43 g
Net weight	48.1 g		

### Temperatures

Operating temperature	-40 °C...+70 °C	Storage temperature	-40 °C...+70 °C
-----------------------	-----------------	---------------------	-----------------

### Output

Max. switching voltage, AC	300 V	Continuous current	10 A
----------------------------	-------	--------------------	------

### General data

Wire connection method	Screw connection	Weight	43 g
Wire cross-section, solid, max.	2.5 mm <sup>2</sup>		

### Further details of approvals / standards

Certificate No. (cURus)	E312083
-------------------------	---------

### Connection data

Clamping range, rated connection, max.	2.5 mm <sup>2</sup>	Clamping range, rated connection, min.	0.5 mm <sup>2</sup>
Conductor cross-section, flexible, AEH (DIN 46228-1), max.	2.5 mm <sup>2</sup>	Conductor cross-section, flexible, AEH (DIN 46228-1), min.	0.5 mm <sup>2</sup>
Cross-section for connected conductor, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, min.	0.5 mm <sup>2</sup>	Tightening torque, max.	0.8 Nm
Tightening torque, min.	0.5 Nm	Wire connection cross section, finely stranded, max.	2.5 mm <sup>2</sup>
Wire connection cross section, finely stranded, two clampable wires, min.	0.5 mm <sup>2</sup>	Wire connection cross-section, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, max.	1.5 mm <sup>2</sup>
Wire connection cross-section, finely stranded, min.	0.5 mm <sup>2</sup>	Wire connection method	Screw connection
Wire cross-section, finely stranded, two clampable wires, max.	2.5 mm <sup>2</sup>	Wire cross-section, solid, max.	2.5 mm <sup>2</sup>
Wire cross-section, solid, min.	0.5 mm <sup>2</sup>		

### Classifications

eClass 6.2	27-37-16-01
------------	-------------

### Approvals

Approvals



### Downloads

Declaration of Conformity	<a href="#">K550_10_13.pdf</a>
---------------------------	--------------------------------


Creation date June 2, 2014 12:08:25 PM CEST

**D-SERIES  
FS 4CO**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Drawings**

**Dimensioned drawing**

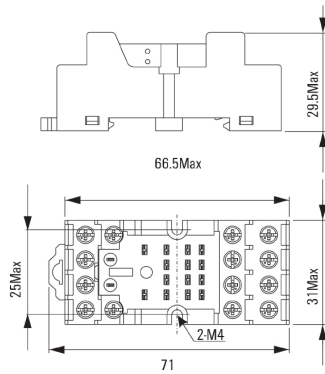

**D-SERIES  
FS 4CO**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Mating connector (fully pluggable)**
**with LED**


Relay from the D-SERIES DRM.

- 2 or 4 CO contacts
- Compact design
- Wide range of coil voltages
- Optional test button (AC red, DC blue)
- Optional with integrated status display (AC red, DC green) and/or free-wheel diode

**General ordering data**

Type	Order No.	Version	GTIN (EAN)	Qty.
DRM570024L Au	<a href="#">7760056187</a>	D-SERIES, Relais, No. of contacts: 4, CO contact, AgNi 5µm Au, Rated control voltage: 24 V DC, Continuous current: 5 A, Plug-in connection	4032248922260	20 pc(s).
DRM570730L Au	<a href="#">7760056188</a>	D-SERIES, Relais, No. of contacts: 4, CO contact, AgNi 5µm Au, Rated control voltage: 230 V AC, Continuous current: 5 A, Plug-in connection	4032248922277	20 pc(s).

**with LED and test button**


Relay from the D-SERIES DRM.

- 2 or 4 CO contacts
- Compact design
- Wide range of coil voltages
- Optional test button (AC red, DC blue)
- Optional with integrated status display (AC red, DC green) and/or free-wheel diode

**General ordering data**

Type	Order No.	Version	GTIN (EAN)	Qty.
DRM570220L Au	<a href="#">7760056100</a>	D-SERIES, Relais, No. of contacts: 4, CO contact with test button, AgNi 90/10, Rated control voltage: 220 V DC, Continuous current: 5 A, Plug-in connection	4032248855643	20 pc(s).
DRM570048L Au	<a href="#">7760056098</a>	D-SERIES, Relais, No. of contacts: 4, CO contact with test button, AgNi 90/10, Rated control voltage: 48 V DC,	4032248855667	20 pc(s).

**D-SERIES  
FS 4CO**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Mating connector (fully pluggable)**

	Continuous current: 5 A, Plug-in connection	
DRM570012LT760056096	D-SERIES, Relais, No. of contacts: 4, CO contact with test button, AgNi 90/10, Rated control voltage: 12 V DC, Continuous current: 5 A, Plug-in connection	4032248855681 20 pc(s).
DRM570024LT760056097	D-SERIES, Relais, No. of contacts: 4, CO contact with test button, AgNi 90/10, Rated control voltage: 24 V DC, Continuous current: 5 A, Plug-in connection	4032248855674 20 pc(s).
DRM570548LT760056102	D-SERIES, Relais, No. of contacts: 4, CO contact with test button, AgNi 90/10, Rated control voltage: 48 V AC, Continuous current: 5 A, Plug-in connection	4032248855629 20 pc(s).
DRM570110LT760056099	D-SERIES, Relais, No. of contacts: 4, CO contact with test button, AgNi 90/10, Rated control voltage: 110 V DC, Continuous current: 5 A, Plug-in connection	4032248855650 20 pc(s).
DRM570615LT760056103	D-SERIES, Relais, No. of contacts: 4, CO contact with test button, AgNi 90/10, Rated control voltage: 115 V AC, Continuous current: 5 A, Plug-in connection	4032248855612 20 pc(s).
DRM570730LT760056104	D-SERIES, Relais, No. of contacts: 4, CO contact with test button, AgNi 90/10, Rated control voltage: 230 V AC, Continuous current: 5 A, Plug-in connection	4032248855605 20 pc(s).
DRM570524LT760056101	D-SERIES, Relais, No. of contacts: 4, CO contact with test button, AgNi 90/10, Rated control voltage: 24 V AC, Continuous current: 5 A, Plug-in connection	4032248855636 20 pc(s).

## D-SERIES FS 4CO

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

### Mating connector (fully pluggable)

#### with LED and test button



Relay from the D-SERIES DRM.

- 2 or 4 CO contacts
- Compact design
- Wide range of coil voltages
- Optional test button (AC red, DC blue)
- Optional with integrated status display (AC red, DC green) and/or free-wheel diode

#### General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.
DRM270048L	<a href="#">T760056070</a>	D-SERIES, Relais, No. of contacts: 2, CO contact with test button, AgNi 90/10, Rated control voltage: 48 V DC, Continuous current: 10 A, Plug-in connection	4032248855858	20 pc(s).
DRM270524L	<a href="#">T760056073</a>	D-SERIES, Relais, No. of contacts: 2, CO contact with test button, AgNi 90/10, Rated control voltage: 24 V AC, Continuous current: 10 A, Plug-in connection	4032248855827	20 pc(s).
DRM270012L	<a href="#">T760056068</a>	D-SERIES, Relais, No. of contacts: 2, CO contact with test button, AgNi 90/10, Rated control voltage: 12 V DC, Continuous current: 10 A, Plug-in connection	4032248855872	20 pc(s).
DRM270220L	<a href="#">T760056072</a>	D-SERIES, Relais, No. of contacts: 2, CO contact with test button, AgNi 90/10, Rated control voltage: 220 V DC, Continuous current: 10 A, Plug-in connection	4032248855834	20 pc(s).
DRM270730L	<a href="#">T760056076</a>	D-SERIES, Relais, No. of contacts: 2, CO contact with test button, AgNi 90/10, Rated control voltage: 230 V AC, Continuous current: 10 A, Plug-in connection	4032248855797	20 pc(s).
DRM270548L	<a href="#">T760056074</a>	D-SERIES, Relais, No. of contacts: 2, CO contact with test button, AgNi 90/10, Rated control voltage: 48 V AC,	4032248855810	20 pc(s).

**D-SERIES  
FS 4CO**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Mating connector (fully pluggable)**

	Continuous current: 10 A, Plug-in connection
DRM270615L <a href="#">7760056075</a>	D-SERIES, Relais, No. of 4032248855803 20 pc(s). contacts: 2, CO contact with test button, AgNi 90/10, Rated control voltage: 115 V AC, Continuous current: 10 A, Plug-in connection
DRM270024L <a href="#">7760056069</a>	D-SERIES, Relais, No. of 4032248855865 20 pc(s). contacts: 2, CO contact with test button, AgNi 90/10, Rated control voltage: 24 V DC, Continuous current: 10 A, Plug-in connection
DRM270110L <a href="#">7760056071</a>	D-SERIES, Relais, No. of 4032248855841 20 pc(s). contacts: 2, CO contact with test button, AgNi 90/10, Rated control voltage: 110 V DC, Continuous current: 10 A, Plug-in connection

**with LED**



Relay from the D-SERIES DRM.

- 2 or 4 CO contacts
- Compact design
- Wide range of coil voltages
- Optional test button (AC red, DC blue)
- Optional with integrated status display (AC red, DC green) and/or free-wheel diode

**General ordering data**

Type	Order No.	Version	GTIN (EAN)	Qty.
DRM570024L	<a href="#">7760056088</a>	D-SERIES, Relais, No. of contacts: 4, CO contact, AgNi 90/10, Rated control voltage: 24 V DC, Continuous current: 5 A, Plug-in connection	4032248855766	20 pc(s).
DRM570110L	<a href="#">7760056090</a>	D-SERIES, Relais, No. of contacts: 4, CO contact, AgNi 90/10, Rated control voltage: 110 V DC, Continuous current: 5 A, Plug-in connection	4032248855742	20 pc(s).
DRM570220L	<a href="#">7760056091</a>	D-SERIES, Relais, No. of contacts: 4, CO contact, AgNi 90/10, Rated control voltage: 220 V DC,	4032248855735	20 pc(s).

**D-SERIES**  
**FS 4CO**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Mating connector (fully pluggable)**

	Continuous current: 5 A, Plug-in connection
DRM570615L <a href="#">7760056094</a>	D-SERIES, Relais, No. of 4032248855704 20 pc(s). contacts: 4, CO contact, AgNi 90/10, Rated control voltage: 115 V AC, Continuous current: 5 A, Plug-in connection
DRM570524L <a href="#">7760056092</a>	D-SERIES, Relais, No. of 4032248855728 20 pc(s). contacts: 4, CO contact, AgNi 90/10, Rated control voltage: 24 V AC, Continuous current: 5 A, Plug-in connection
DRM570012L <a href="#">7760056087</a>	D-SERIES, Relais, No. of 4032248855773 20 pc(s). contacts: 4, CO contact, AgNi 90/10, Rated control voltage: 12 V DC, Continuous current: 5 A, Plug-in connection
DRM570548L <a href="#">7760056093</a>	D-SERIES, Relais, No. of 4032248855711 20 pc(s). contacts: 4, CO contact, AgNi 90/10, Rated control voltage: 48 V AC, Continuous current: 5 A, Plug-in connection
DRM570048L <a href="#">7760056089</a>	D-SERIES, Relais, No. of 4032248855759 20 pc(s). contacts: 4, CO contact, AgNi 90/10, Rated control voltage: 48 V DC, Continuous current: 5 A, Plug-in connection
DRM570730L <a href="#">7760056095</a>	D-SERIES, Relais, No. of 4032248855698 20 pc(s). contacts: 4, CO contact, AgNi 90/10, Rated control voltage: 230 V AC, Continuous current: 5 A, Plug-in connection



**D-SERIES  
FS 4CO**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Mating connector (fully pluggable)**
**with LED and test button**


Relay from the D-SERIES DRM.

- 2 or 4 CO contacts
- Compact design
- Wide range of coil voltages
- Optional test button (AC red, DC blue)
- Optional with integrated status display (AC red, DC green) and/or free-wheel diode

**General ordering data**

Type	Order No.	Version	GTIN (EAN)	Qty.
DRM570024L Au	<a href="#">7760056189</a>	D-SERIES, Relais, No. of contacts: 4, CO contact with test button, AgNi 5µm Au, Rated control voltage: 24 V DC, Continuous current: 5 A, Plug-in connection	4032248922284	20 pc(s).
DRM570730L Au	<a href="#">7760056190</a>	D-SERIES, Relais, No. of contacts: 4, CO contact with test button, AgNi 5µm Au, Rated control voltage: 230 V AC, Continuous current: 5 A, Plug-in connection	4032248922291	20 pc(s).

**with LED**


Relay from the D-SERIES DRM.

- 2 or 4 CO contacts
- Compact design
- Wide range of coil voltages
- Optional test button (AC red, DC blue)
- Optional with integrated status display (AC red, DC green) and/or free-wheel diode

**General ordering data**

Type	Order No.	Version	GTIN (EAN)	Qty.
DRM270730L Au	<a href="#">7760056184</a>	D-SERIES, Relais, No. of contacts: 2, CO contact, AgNi 5µm Au, Rated control voltage: 230 V AC, Continuous current: 10 A, Plug-in connection	4032248922239	20 pc(s).
DRM270024L Au	<a href="#">7760056183</a>	D-SERIES, Relais, No. of contacts: 2, CO contact, AgNi 5µm Au, Rated control voltage: 24 V DC,	4032248922222	20 pc(s).

## D-SERIES FS 4CO

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Mating connector (fully pluggable)

Continuous current: 10 A,  
 Plug-in connection

### with LED



Relay from the D-SERIES DRM.

- 2 or 4 CO contacts
- Compact design
- Wide range of coil voltages
- Optional test button (AC red, DC blue)
- Optional with integrated status display (AC red, DC green) and/or free-wheel diode

### General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.
DRM270110L	<a href="#">7760056062</a>	D-SERIES, Relais, No. of contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 110 V DC, Continuous current: 10 A, Plug-in connection	4032248855933	20 pc(s).
DRM270125L	<a href="#">7760056115</a>	D-SERIES, Relais, No. of contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 125 V DC, Continuous current: 10 A, Plug-in connection	4032248883110	20 pc(s).
DRM270548L	<a href="#">7760056065</a>	D-SERIES, Relais, No. of contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 48 V AC, Continuous current: 10 A, Plug-in connection	4032248855902	20 pc(s).
DRM270524L	<a href="#">7760056064</a>	D-SERIES, Relais, No. of contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 24 V AC, Continuous current: 10 A, Plug-in connection	4032248855919	20 pc(s).
DRM270615L	<a href="#">7760056066</a>	D-SERIES, Relais, No. of contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 115 V AC, Continuous current: 10 A, Plug-in connection	4032248855896	20 pc(s).
DRM270048L	<a href="#">7760056061</a>	D-SERIES, Relais, No. of contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 48 V DC, Continuous current: 10 A, Plug-in connection	4032248855940	20 pc(s).

## D-SERIES FS 4CO

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

### Mating connector (fully pluggable)

DRM270220L <a href="#">7760056063</a>	D-SERIES, Relais, No. of contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 220 V DC, Continuous current: 10 A, Plug-in connection	4032248855926 20 pc(s).
DRM270012L <a href="#">7760056059</a>	D-SERIES, Relais, No. of contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 12 V DC, Continuous current: 10 A, Plug-in connection	4032248855964 20 pc(s).
DRM270730L <a href="#">7760056067</a>	D-SERIES, Relais, No. of contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 230 V AC, Continuous current: 10 A, Plug-in connection	4032248855889 20 pc(s).
DRM270024L <a href="#">7760056060</a>	D-SERIES, Relais, No. of contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 24 V DC, Continuous current: 10 A, Plug-in connection	4032248855957 20 pc(s).

### standard relay



Relay from the D-SERIES DRM.

- 2 or 4 CO contacts
- Compact design
- Wide range of coil voltages
- Optional test button (AC red, DC blue)
- Optional with integrated status display (AC red, DC green) and/or free-wheel diode

### General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.
DRM570220	<a href="#">7760056082</a>	D-SERIES, Relais, No. of contacts: 4, CO contact, AgNi 90/10, Rated control voltage: 220 V DC, Continuous current: 5 A, Plug-in connection	4032248855162	20 pc(s).
DRM570048	<a href="#">7760056080</a>	D-SERIES, Relais, No. of contacts: 4, CO contact, AgNi 90/10, Rated control voltage: 48 V DC, Continuous current: 5 A, Plug-in connection	4032248855148	20 pc(s).
DRM570615	<a href="#">7760056085</a>	D-SERIES, Relais, No. of contacts: 4, CO contact, AgNi 90/10, Rated	4032248855230	20 pc(s).

**D-SERIES**  
**FS 4CO**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Mating connector (fully pluggable)**

	control voltage: 115 V AC, Continuous current: 5 A, Plug-in connection
DRM570110 <a href="#">7760056081</a>	D-SERIES, Relais, No. of 4032248855 131 20 pc(s). contacts: 4, CO contact, AgNi 90/10, Rated control voltage: 110 V DC, Continuous current: 5 A, Plug-in connection
DRM570730 <a href="#">7760056086</a>	D-SERIES, Relais, No. of 4032248855 254 20 pc(s). contacts: 4, CO contact, AgNi 90/10, Rated control voltage: 230 V AC, Continuous current: 5 A, Plug-in connection
DRM570012 <a href="#">7760056078</a>	D-SERIES, Relais, No. of 4032248855 117 20 pc(s). contacts: 4, CO contact, AgNi 90/10, Rated control voltage: 12 V DC, Continuous current: 5 A, Plug-in connection
DRM570024 <a href="#">7760056079</a>	D-SERIES, Relais, No. of 4032248855 124 20 pc(s). contacts: 4, CO contact, AgNi 90/10, Rated control voltage: 24 V DC, Continuous current: 5 A, Plug-in connection
DRM570524 <a href="#">7760056083</a>	D-SERIES, Relais, No. of 4032248855 186 20 pc(s). contacts: 4, CO contact, AgNi 90/10, Rated control voltage: 24 V AC, Continuous current: 5 A, Plug-in connection
DRM570548 <a href="#">7760056084</a>	D-SERIES, Relais, No. of 4032248855 193 20 pc(s). contacts: 4, CO contact, AgNi 90/10, Rated control voltage: 48 V AC, Continuous current: 5 A, Plug-in connection

**D-SERIES  
FS 4CO**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Mating connector (fully pluggable)****standard relay**

Relay from the D-SERIES DRM.

- 2 or 4 CO contacts
- Compact design
- Wide range of coil voltages
- Optional test button (AC red, DC blue)
- Optional with integrated status display (AC red, DC green) and/or free-wheel diode

**General ordering data**

Type	Order No.	Version	GTIN (EAN)	Qty.
DRM270615	<a href="#">7760056057</a>	D-SERIES, Relais, No. of contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 115 V AC, Continuous current: 10 A, Plug-in connection	4032248855988	20 pc(s).
DRM270730	<a href="#">7760056058</a>	D-SERIES, Relais, No. of contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 230 V AC, Continuous current: 10 A, Plug-in connection	4032248855971	20 pc(s).
DRM270012	<a href="#">7760056050</a>	D-SERIES, Relais, No. of contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 12 V DC, Continuous current: 10 A, Plug-in connection	4032248856053	20 pc(s).
DRM270524	<a href="#">7760056055</a>	D-SERIES, Relais, No. of contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 24 V AC, Continuous current: 10 A, Plug-in connection	4032248856008	20 pc(s).
DRM270548	<a href="#">7760056056</a>	D-SERIES, Relais, No. of contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 48 V AC, Continuous current: 10 A, Plug-in connection	4032248855995	20 pc(s).
DRM270048	<a href="#">7760056052</a>	D-SERIES, Relais, No. of contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 48 V DC, Continuous current: 10 A, Plug-in connection	4032248856039	20 pc(s).
DRM270220	<a href="#">7760056054</a>	D-SERIES, Relais, No. of contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 220 V DC,	4032248856015	20 pc(s).

Creation date June 2, 2014 12:08:26 PM CEST

**D-SERIES  
FS 4CO**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Mating connector (fully pluggable)**

	Continuous current: 10 A, Plug-in connection
DRM270110 <a href="#">7760056053</a>	D-SERIES, Relais, No. of 4032248856022 20 pc(s). contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 110 V DC, Continuous current: 10 A, Plug-in connection
DRM270024 <a href="#">7760056051</a>	D-SERIES, Relais, No. of 4032248856046 20 pc(s). contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 24 V DC, Continuous current: 10 A, Plug-in connection

**with LED and free-wheel diode**



Relay from the D-SERIES DRM.

- 2 or 4 CO contacts
- Compact design
- Wide range of coil voltages
- Optional test button (AC red, DC blue)
- Optional with integrated status display (AC red, DC green)  
and/or free-wheel diode

**General ordering data**

Type	Order No.	Version	GTIN (EAN)	Qty.
DRM570024LD	<a href="#">760056123</a>	D-SERIES, Relais, No. of contacts: 4, CO contact, AgNi 90/10, Rated control voltage: 24 V DC, Continuous current: 5 A, Plug-in connection	403224885551	20 pc(s).
DRM570024LD	<a href="#">760056105</a>	D-SERIES, Relais, No. of contacts: 4, CO contact, AgNi 90/10, Rated control voltage: 24 V DC, Continuous current: 5 A, Plug-in connection	4032248855599	20 pc(s).

**D-SERIES  
FS 4CO**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Mating connector (fully pluggable)**
**with LED and test button**


Relay from the D-SERIES DRM.

- 2 or 4 CO contacts
- Compact design
- Wide range of coil voltages
- Optional test button (AC red, DC blue)
- Optional with integrated status display (AC red, DC green) and/or free-wheel diode

**General ordering data**

Type	Order No.	Version	GTIN (EAN)	Qty.
DRM270730L	<a href="#">760056186</a>	D-SERIES, Relais, No. of contacts: 2, CO contact with test button, AgNi 5µm	4032248922253	20 pc(s).
Au		Au, Rated control voltage: 230 V AC, Continuous current: 10 A, Plug-in connection		
DRM270024L	<a href="#">760056185</a>	D-SERIES, Relais, No. of contacts: 2, CO contact with test button, AgNi 5µm	4032248922246	20 pc(s).
Au		Au, Rated control voltage: 24 V DC, Continuous current: 10 A, Plug-in connection		

**with LED and free-wheel diode**


Relay from the D-SERIES DRM.

- 2 or 4 CO contacts
- Compact design
- Wide range of coil voltages
- Optional test button (AC red, DC blue)
- Optional with integrated status display (AC red, DC green) and/or free-wheel diode

**General ordering data**

Type	Order No.	Version	GTIN (EAN)	Qty.
DRM270024L	<a href="#">760056124</a>	D-SERIES, Relais, No. of contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 24 V DC, Continuous current: 10 A, Plug-in connection	4032248855544	20 pc(s).
DRM270024L	<a href="#">760056077</a>	D-SERIES, Relais, No. of contacts: 2, CO contact, AgNi 90/10, Rated control voltage: 24 V DC,	4032248855780	20 pc(s).

**D-SERIES  
FS 4CO**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

**Mating connector (fully pluggable)**

Continuous current: 10 A,  
Plug-in connection