


IP 44/54/55 weatherproof bulkhead lights (continued)

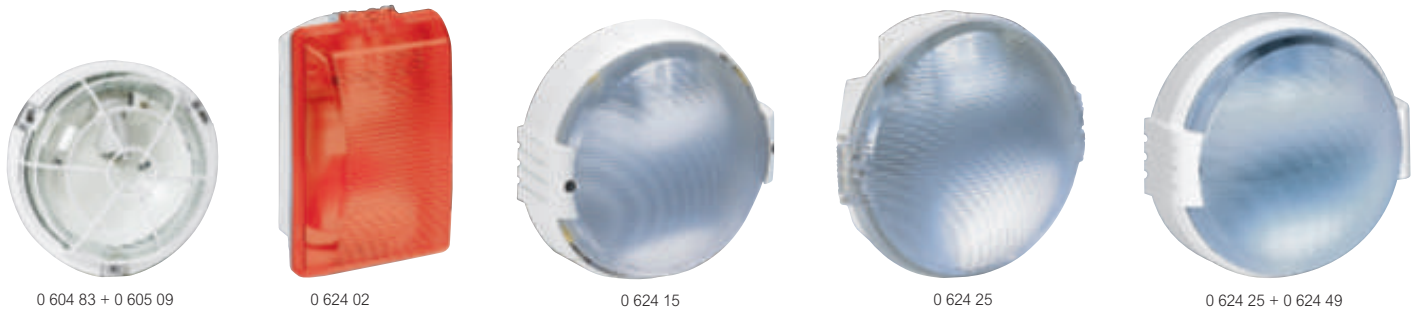

0 604 83 + 0 605 09

0 624 02

0 624 15

0 624 25

0 624 25 + 0 624 49

Dimensions **see e-catalogue**

For domestic, commercial areas and tough environments

Pack	Cat.Nos	Description	Pack	Cat.Nos	Description
1	E 27 0 604 77	IP 55 - IK 04 bulkhead lights for tough environments IP 55 - IK 04 bulkhead lights Metal/glass bulkhead lights. For exterior/indoor use For industrial use. Earth terminal - 3 entries in T. Operating temperature: - min.: - 30 °C - max.: + 35 °C Can be equipped with metal protection grid for IK 07 protection	1	E 27 0 624 15	IP 55 - IK 08 round Koro bulkhead light – class II For risk situation, indoors and outdoors tough. environments, internal and external applications IP 55 - IK 09 - class II Security assured by covering trim. Locked with 2 special screws which may be locked with key Cat.No 0 919 45 (below). Shock-resistant polycarbonate diffuser. Opening can be reversed right / left supplied with 1 Plexo membrane gland. Through-wiring or terminal connection (side or rear). ○ White
1	0 604 83	Oval - for 55 W halogen, 17 W compact fluorescent or 8 W LED lamps With colourless glass diffuser	1	0 919 45	Vandal resistant accessory Screwdriver to remove/tighten tamperproof screws
1	0 605 08	Round - for 70 W halogen, 20 W compact fluorescent or 12 W LED lamps With colourless diffuser	1	0 624 49	IP 54 - IK 08 Plexo rectangular bulkhead lights – class II IP 54 - IK 08 - class II Polycarbonate diffuser, mounted on hinge Opening can be reversed right/left Supplied with 1 Plexo end cap, not assembled Through wiring or terminal connection (side or back). Porcelain lampholder mounted on reflector (swivel pull-out type). Self-extinguishing at 850 °C. ○ White
1	0 605 09	Metal protection grids for IK 07 protection For bulkhead light Cat.No 0 604 77 For bulkhead light Cat.No 0 604 83	5	E 27 0 624 25	For E27 - 70 W halogen, 20 W compact fluorescent or 12 W LED lamps
5	E 27 0 624 00	IP 54 - IK 08 Plexo rectangular bulkhead lights – class II Polycarbonate diffuser, mounted on hinge Opening can be reversed Top/Base Supplied with one Plexo end cap, not assembled. Through wiring or terminal connection (side or rear). Lampholder mounted on reflector (swivel pull-out type) Grey base self-extinguishing: 850 °C For E27 - 55 W halogen, 17 W compact fluorescent or 8 W LED lamps	1	0 624 49	Finishing accessory White clip-on cover plate for round bulkhead lights Polycarbonate
5	0 624 02	With clear diffuser With red diffuser	12	Grey 0 604 14	Oval - IP 44 / IK 06 Polypropylene base. Glass diffuser Galvanised steel or plastic. Protection wire grid. 3 side knockable entries, for Ø16, 20 mm. cable - 230 V - 50 Hz Self-extinguishing: 850 °C For compact fluorescent lamps Porcelain lampholder. Screw terminals
10	B 22 0 604 50 E 27 0 604 51 0 604 58 0 604 59	IP 44 - IK 07 round bulkhead lights Polypropylene base. For 23 W compact fluorescent lamps. Diffuser is assembled by a 1/4 turn rotation. Porcelain lampholder ○ White Glass diffuser Polycarbonate diffuser	12	White 0 604 15	12 W - E 27 Metal grid - no tool required Metal grid - screw fixing Plastic grid - screw fixing
			12	0 604 05 0 604 92	
			10	0 604 19	20 W - E 27 Metal grid - screw fixing