


Viking™ 3 accessories for terminal blocks (continued)

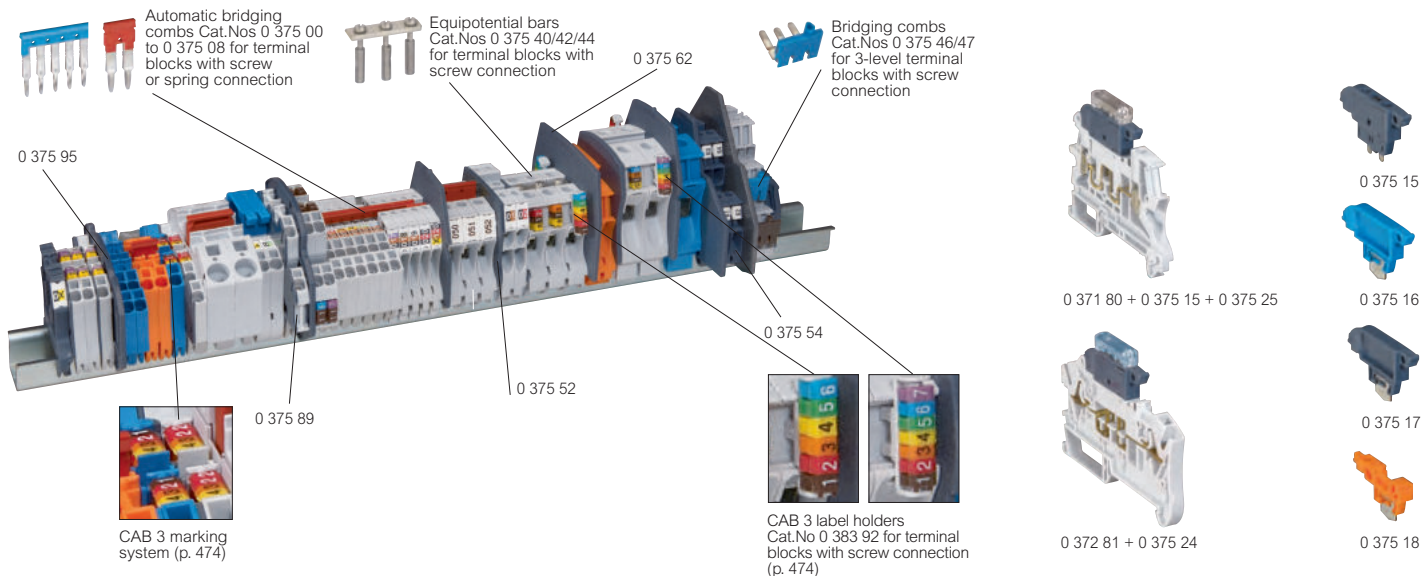

Technical characteristics p. 469

Pack Cat.Nos Separation and insulation dividers

Pack	Cat.Nos	Description
		Grey
20	0 375 60	For screw terminal blocks 1 entry/1 outlet 5, 6, 8 and 10 mm pitch
10	0 375 61	1 entry/1 outlet 12 and 15 mm pitch
10	0 375 62	2 entries/2 outlets and disconnect type 6 mm pitch
10	0 375 63	2 levels
20	0 375 54	3 levels
		For spring terminal blocks
10	0 375 95	1 entry/1 outlet, 1 entry/2 outlets and 2 entries/2 outlets 5 and 6 mm pitch
10	0 375 96	2 levels

Equipotential bridging accessories

Pack	Cat.Nos	Description
		Bridging combs for screw and spring terminal blocks Front mounting (automatic insertion), screwless Isolated and separable Consecutive or alternating connection
20	0 375 00 ¹	For 10 blocks with 5 mm pitch - blue
20	0 375 01 ¹	For 10 blocks with 5 mm pitch - red
50	0 375 02 ¹	For 2 blocks with 5 mm pitch - red
20	0 375 03 ²	For 10 blocks with 6 mm pitch - blue
20	0 375 04 ²	For 10 blocks with 6 mm pitch - red
50	0 375 05 ²	For 2 blocks with 6 mm pitch - red
20	0 375 07 ³	For 3 blocks with 8 mm pitch - red
20	0 375 08 ³	For 2 blocks with 8 mm pitch - red
		Bars for screw terminal blocks Front mounting with screws Pre-assembled, not insulated bar Consecutive or alternating connection
10	0 375 40	For 12 blocks with 10 mm pitch
10	0 375 42 ⁴	For 12 blocks with 12 mm pitch
10	0 375 44	For 12 blocks with 15 mm pitch
		Bridging combs for 3-level screw terminal blocks For lower and intermediate levels of blocks Cat.Nos 0 371 51/52 Side mounting Insulated and separable
10	0 375 46	For 12 blocks with 5 mm pitch - brown
10	0 375 47	For 12 blocks with 5 mm pitch - blue
		Bridging combs for spring terminal blocks Front mounting (automatic insertion), screwless Isolated Red
20	0 375 82	For 2 blocks with 10 mm pitch
20	0 375 85	For 2 blocks with 12 mm pitch

Pack Cat.Nos Accessories for disconnect blocks

Pack	Cat.Nos	Description
		For screw and spring terminal blocks
		Blade type levers For open blocks Cat. Nos 0 371 80 and 0 372 80 Manual disconnection for handle type, tool required for mini lever type
50	0 375 15	With handle lever for fuse cartridge 5 x 20
50	0 375 16	Blue handle lever for neutral
50	0 375 17	Grey handle lever
50	0 375 18	Mini lever
		Joining rods For handle and mini lever
20	0 375 21	For 2 blocks
20	0 375 22	For 3 blocks
		Blown fuse indicators Clip directly onto blocks Cat.Nos 0 371 81, 0 372 81 or handle lever 0 375 15 (with power off)
50	0 375 24	12/24/48 V _{AC} and ~ for block with fuse cartridge 5 x 20 with handle lever
50	0 375 25	110/250 V _{AC} for block with fuse cartridge 5 x 20 with handle lever

1: Cat. No 0 371 51/52: upper level only
Cat. No 0 372 56: lower level only
Cat. No 0 372 54: non shunttable
2: Cat. No 0 371 56: lower level only
3: Except for Cat.No 0 371 92
4: Except for Cat.No 0 371 87